




## FD-G Series Conventional Dryers

For High temperature/ High capacity drying - Nyle's FD-G line of Food Dryers, featuring the FD-G1000 and FD-G600. Though designed for your high temperature drying needs (up to 220°F), they are capable of drying your products in the 80° - 220°F (26° - 104°C) temperature range. Each FD-G dryer includes an insulated, energy saving chamber, an indirect fired gas furnace (natural gas or propane), blower and a user friendly touch screen control panel.

Dimensions				
Unit	Rack Capacity (# of Racks)	L (in)	W (in)	H (in)
FD-G 600	15	223	74	123
FD-G 1000	21	283	74	123

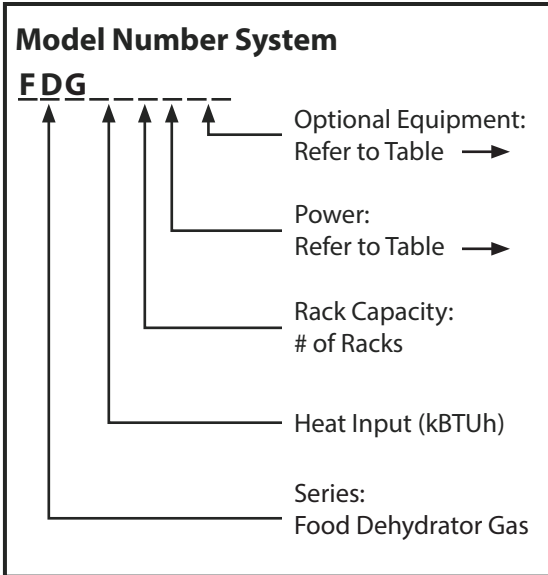

Option	Notes	Designation
Floor	Adds 4" to dimension (C)	F

Voltage (V)	Phase (Φ)	Frequency (Hz)	Amps (A)		Designation
			FD-G 600	FD-G 1000	
208	3	60	53	53	F
480	3	60	23	23	C



Model	Blower Watts (kW)	Heat Input Max (BTU/hr)	Temperature (F)	Rack Capacity (# of Racks)	Drying Area (sqft)	Interior Finish	Exterior Finish
FD-G 600	11	800,000	80 - 220	15	975	Stainless Steel or Aluminum	Galvalume Steel
FD-G 1000	11	1,200,000	80 - 220	21	1,365		

**Note:** In view of ongoing product improvements, designs and specifications are subject to change without notice. Nyle Systems can accept no responsibility for possible errors in catalogs, brochures or any other printed material.