


Unit	Rack Capacity (# of Racks)	Dimensions		
		A (in)	B (in)	C (in)
FD10	4	136	70	110
FD14	4	145	70	110
	6	169	70	110
	8	191	70	110
FD24	8	191	70	110
	10	213	70	110
	12	237	70	110
FD60	12	212	96	110
	15	234	96	110
	18	258	96	110
	21	280	96	110
	24	302	96	110

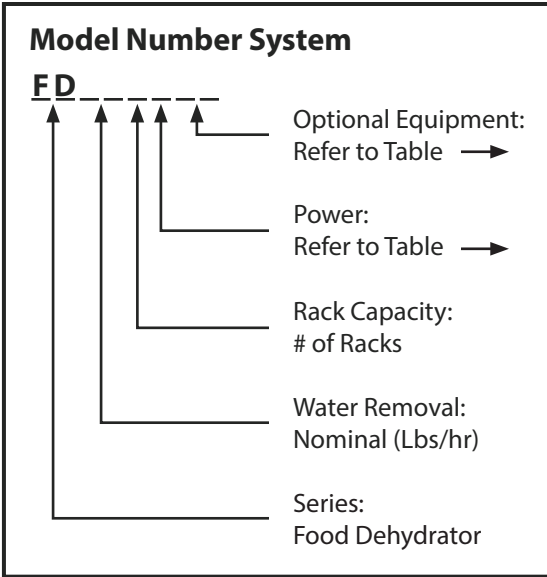

Option	Notes	Designation
Venting	120F-160F over temp control, adds 24" to dimension. (C)	V
External Condenser	80F- 120F over temp control	E
Floor	Adds 4" to dimension (C)	F

Voltage (V)	Phase (Φ)	Frequency (Hz)	Amps (A)				Designation
			FD10	FD14	FD24	FD60	
208 - 220/240	1	60	47	87	114	N/A	A
	3	60	N/A	45	70	151	F
480	3	60	N/A	23	34	70	C

Model	Dehumidification Watts (kW)	Auxiliary Heat Watts (kW)	Temperature (F)	Rack Capacity (# of Racks)	Drying Area (sqft)	Interior Finish	Exterior Finish
FD 10	14	4	80 - 120	4	260	Stainless Steel	Galvalume Steel
FD 14	19	8	80 - 160	4, 6, 8	260 - 520		
FD 24	20	12	80 - 160	8, 10, 12	520 - 780		
FD 60	25	48	80 - 160	12, 15, 18, 21, 24	780 - 1560		

**Note:** In view of ongoing product improvements, designs and specifications are subject to change without notice. Nyle Systems can accept no responsibility for possible errors in catalogs, brochures or any other printed material.